



Trailer Wiring Diagrams : Mirage Trailers : TNT Trailer

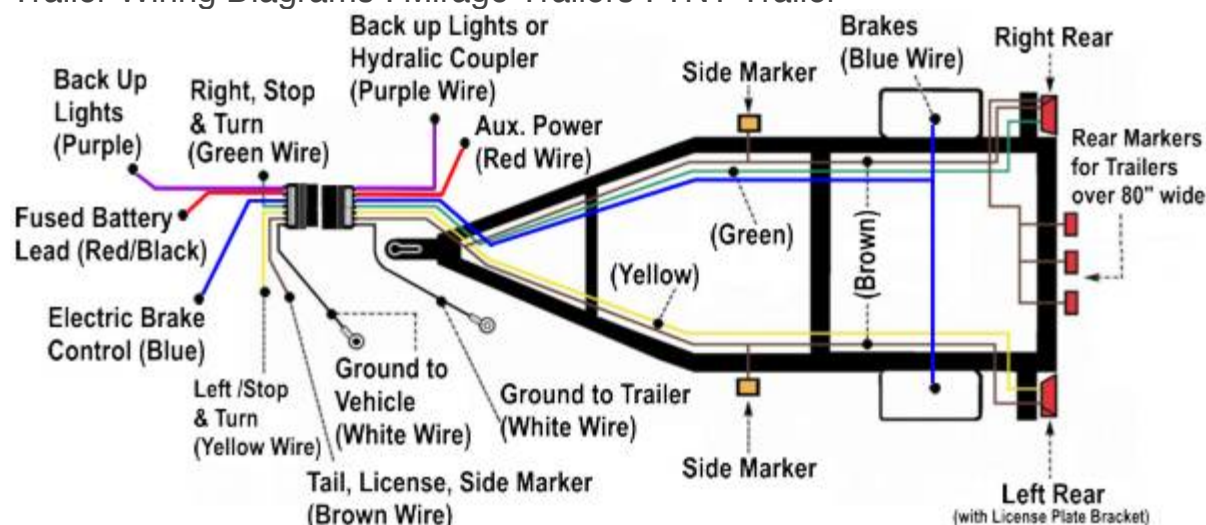

Do you need to know how Mirage trailers are wired? Below you will find trailer wiring diagrams for 7 and 4 way plugs along with the breakaway box.

7 Way Plug

7-WAY RV BLADE CONNECTOR WIRING DIAGRAM

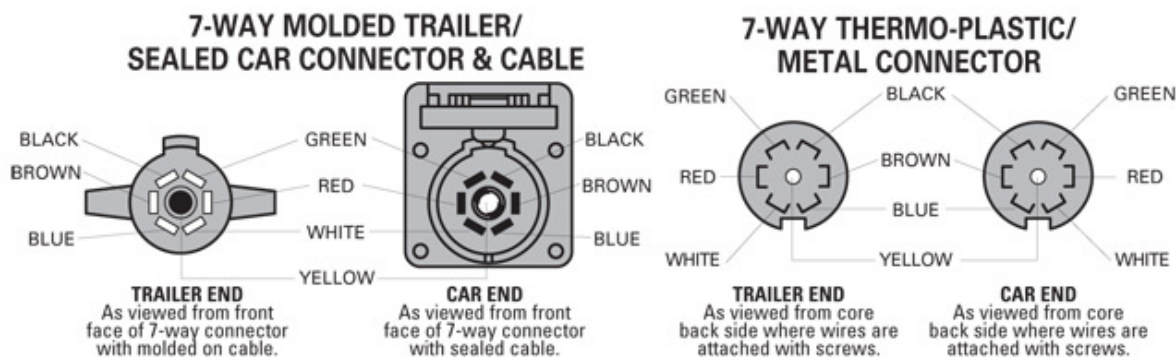

7 - WAY WIRING INDEX


Wire Color & Gauge	Molded Trailer/Sealed Car Connector Terminal	Thermo-Plastic/Metal Connector Terminal
White / 10 gauge	Common Ground	#1 Common Ground
Blue / 12 gauge	Electric Brake	#2 Electric Brake
Green / 14 gauge	Tail & License	#3 Tail & License
Black / 10 gauge	Battery Charge	#4 Battery Charge
Red / 14 gauge	Left Stop & Turn	#5 Left Stop & Turn
Brown / 14 gauge	Right Stop & Turn	#6 Right Stop & Turn
Yellow / 14 gauge	Center Auxiliary	#7 Center Auxiliary

4 Way Plug

White - Ground


Yellow - Left Turn/Stop

Green - Right Turn/Stop

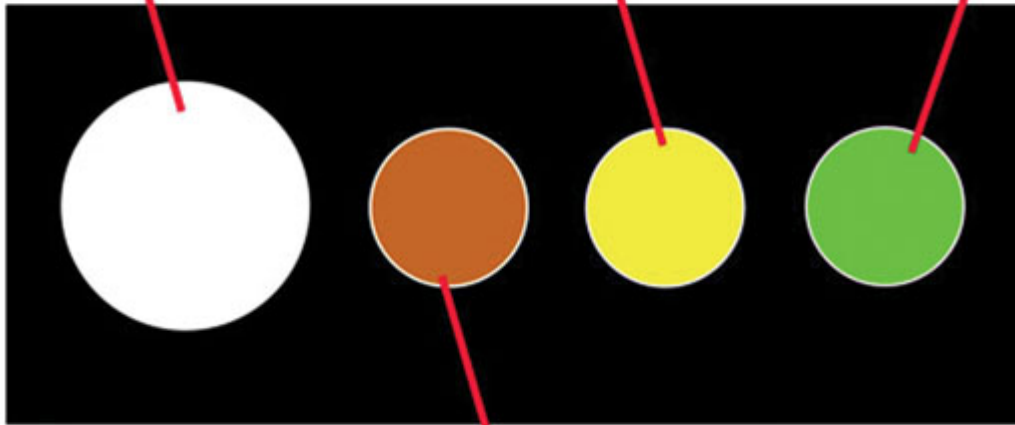


Brown - Tail License, Side Marker, Clear and I.D. Lamp

Junction Box

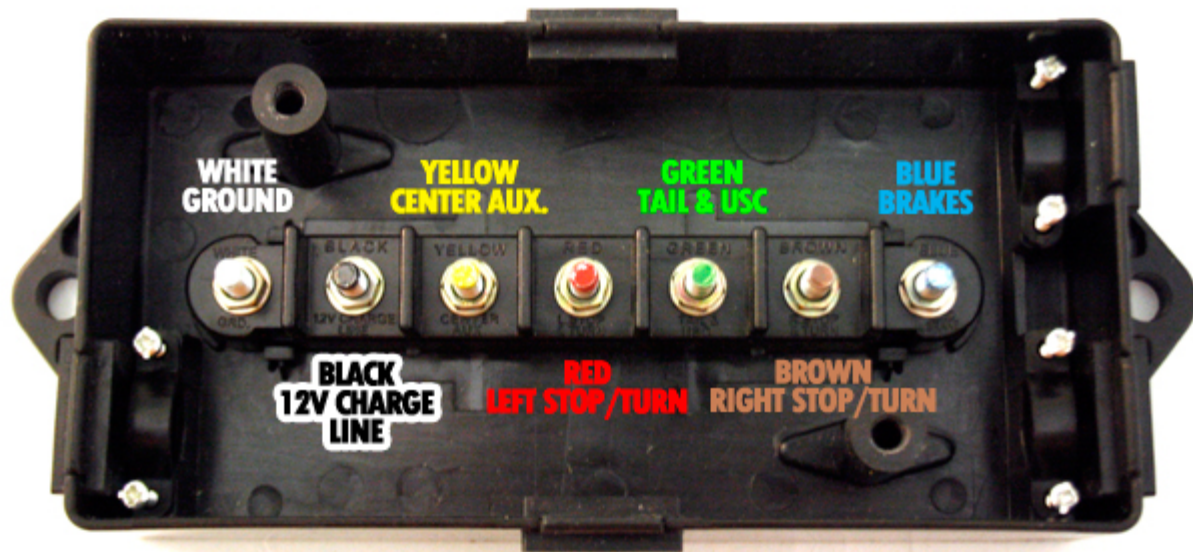

Breakaway Box

Breakaway Box Wiring

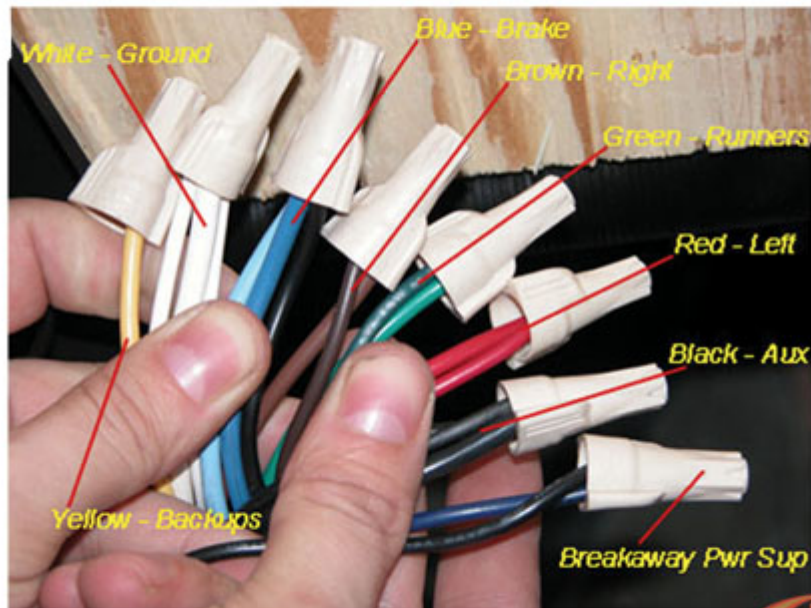

MIRAGE
Trailers

Trailer Wiring Diagram

