

WOOD DECK CAR HAULER TRAILERS - MODEL AW

PROFESSIONAL GRADE

- Treated wood deck
- Standard 2 ft. dovetail
- 82" between fenders
- Double eye spring suspension
- 5' self-storing ramps
- 2 5/16 A frame coupler
- Swing-up jack
- Tear drop fenders with backs
- Stake pockets and rubrail, self-charging break away kit, safety chains, DOT reflective tape, and all rubber mounted sealed beam LED lighting with U.S. made sealed modular harness with 5 year warranty
- Primed, 2 coats of automotive grade acrylic enamel, pin striped



GVWR – 7,000 lb.

- 3,500 lb. braking axles with 4 wheel brakes
- ST205/75R15 load range "C" 6 ply rating RADIAL tires
- 5" channel frame
- 3 x 3 x 3/16 angle cross members. 24" spacing
- 4" channel wrap around tongue

GVWR – 8,000 lb.


- 4,000 lb. braking axles with 4 wheel brakes
- ST225/75R15 load range "D" 8 ply rating RADIAL tires
- 5" channel frame
- 3 x 3 x 3/16 angle cross members. 24" spacing
- 4" channel wrap around tongue

GVWR – 10,000 lb.

- 5,200 lb. braking axles with 4 wheel brakes
- ST225/75R15 load range "D" 8 ply rating RADIAL tires
- 5" channel frame
- 3 x 3 x 3/16 angle cross members 16" spacing
- 5" channel wrap around tongue

GENERAL DUTY

- Treated wood deck
- Standard 2 ft. dovetail
- 82" between fenders
- Double eye spring suspension
- 5' self-storing ramps
- 2 5/16 A frame coupler
- Swing-up jack
- Tear drop fenders with backs
- Stake pockets, self-charging break away kit, safety chains, DOT reflective tape, and all rubber mounted sealed beam lighting with conventional wiring with gel filled connectors.
- Primed, 2 coats of automotive grade acrylic enamel, pin striped

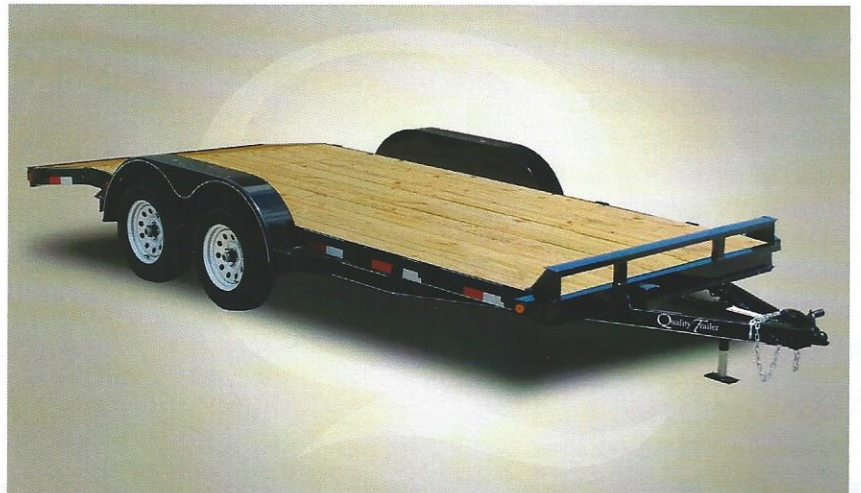

GVWR – 7,000 lb.

- 3,500 lb. braking axles with 4 wheel brakes
- ST205/75D15 load range "C" 6 ply rating BIAS tires
- 5" channel frame
- 3 x 3 x 3/16 angle cross members. 24" spacing
- 4" channel wrap around tongue

GVWR – 8,000 lb.

- 4,000 lb. braking axles with 4 wheel brakes
- ST225/75D15 load range "D" 8 ply rating BIAS tires
- 5" channel frame
- 3 x 3 x 3/16 angle cross members. 24" spacing
- 4" channel wrap around tongue

GVWR – 10,000 lb.

- 5,200 lb. braking axles with 4 wheel brakes
- ST225/75D15 load range "D" 8 ply rating BIAS tires
- 5" channel frame
- 3 x 3 x 3/16 angle cross members 24" spacing
- 5" channel wrap around tongue