


PINTLE HITCH DECKOVER EQUIPMENT TRAILERS - MODEL HP

PROFESSIONAL GRADE 25' (20'+5')

- Treated wood deck
- 96" wood deck, 101.5" to outside of rubrail
- Slipper spring suspension
- 235/80R16 load range "E" 10 ply rating RADIAL tires
- 10" I-beam frame (W10 x 17)
- 6" side rails
- 3" channel cross members 16" spacing
- Cold form continuous tongue (no notching or heating) with tool tray with lockable lid
- 5' swing up ramps with support foot
- Pintle ring on heavy adjustable plate
- 12,000 lb. drop foot jack
- Metal plate over wheels for lowest possible loaded deck height (33")
- Stake pockets and rubrail, self-charging break away kit, safety chains, DOT reflective tape, and all rubber mounted
- sealed beam LED lighting with U.S. made sealed modular harness with 5 year warranty
- Primed, 2 coats of automotive grade acrylic enamel, pin striped

25,000 GVWR - HEAVY-DUTY 10" I-BEAM - TANDEM DUAL

- 10,000 lb. oil bath axles with all wheel electric brakes

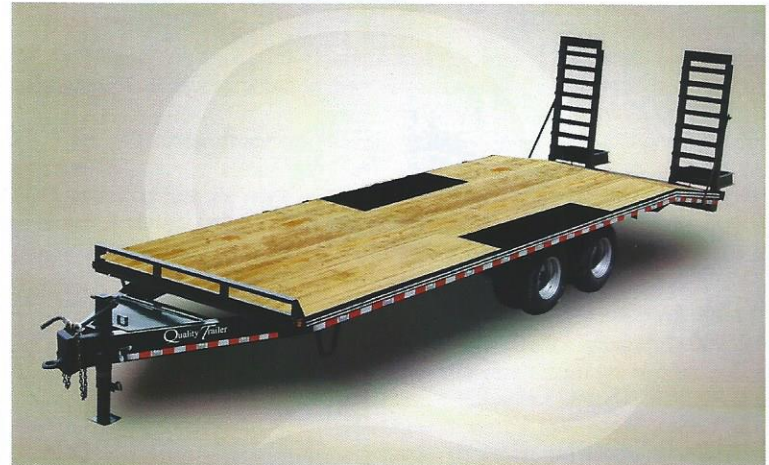

SIZE	PRICE

25,000 GVWR - HEAVY DUTY 10" I-BEAM - TRI-AXLE

- 7,000 lb. braking axles with 6 wheel brakes

GENERAL DUTY 23' (19'+4') • 23' (18'+5')

- Treated wood deck
- 96" wood deck, 101.5" to outside of rubrail
- Slipper spring suspension
- 10" I-beam frame (W10 x 12)
- 6" side rails
- 3" channel cross members 24" spacing
- Cold form continuous tongue (no notching or heating) with tool tray
- 5' swing up ramps with support foot
- Pintle ring on heavy adjustable plate
- 12,000 lb. drop foot jack
- Stake pockets and rubrail, self-charging break away kit, safety chains, DOT reflective tape, and all rubber mounted
- sealed beam lighting with conventional wiring with gel filled connectors.
- Primed, 2 coats of automotive grade acrylic enamel, pin striped

22,000 GVWR - 10" I-BEAM - TANDEM DUAL

- 10,000 lb. oil bath axles with all wheel electric brakes
- 750/16 load range "F" 12 ply rating BIAS tires
- Metal plate over wheels for lowest possible loaded deck height (34")



SIZE	PRICE

22,000 GVWR - 10" I-BEAM - GENERAL DUTY-TRI-AXLE

- 7,000 lb. braking axles with 6 wheel brakes
- 235/80R16 load range "E" 10 ply rating RADIAL tires
- Metal plate over wheels for lowest possible loaded deck height (33")

GENERAL DUTY AND PROFESSIONAL GRADE HP OPTIONS

- 4 ft. Cleated dovetail • 5 ft. Cleated dovetail • Pop-up dovetail
- Lay flat - wedge shaped ramps (5 foot dovetail only)
- Third lay flat ramp • Heavy duty split gate with spring assist
- Third ramp • Replacement ramp • Dual jacks
- Dual speed jacks • Spare tire and wheel • Radial tire upgrade 16"
- Spare Mount • Upgrade to all steel belted load range "G" tires

GENERAL DUTY HP OPTIONS

- Sealed modular wiring harness • LED lighting
- Lockable lid on tool tray • 16" cross member spacing
- 16" radial tire upgrade

THESE OPTIONS COMBINED MAKE UP THE PROFESSIONAL GRADE PACKAGE. PROFESSIONAL GRADE PACKAGE INCLUDES HEAVIER MAIN FRAME NOT LISTED AS AN OPTION.